DISKIT 2
DISKIT 2 PLUS
INSTALLATION INSTRUCTIONS

Overview

There are four simple steps for installation:

- checking jumpers on the controller card
- inserting the card in the IBM system unit
- connecting the drive
- running INSTALL

Rev. O PN 430-12481 610
Copyright ©IDEAssociates 1986

Tools Required

1. A flat blade, medium size screwdriver
2. For some IBM models, pliers or a 1/4" socket wrench
3. A DOS diskette

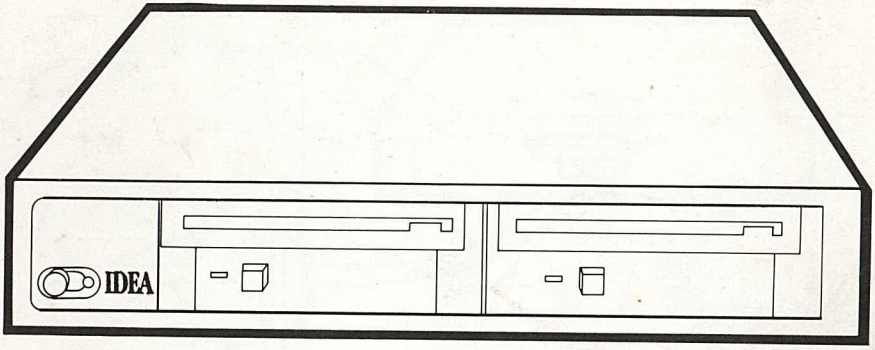

Drive 1 Drive 2

1 The IDEA Controller Card

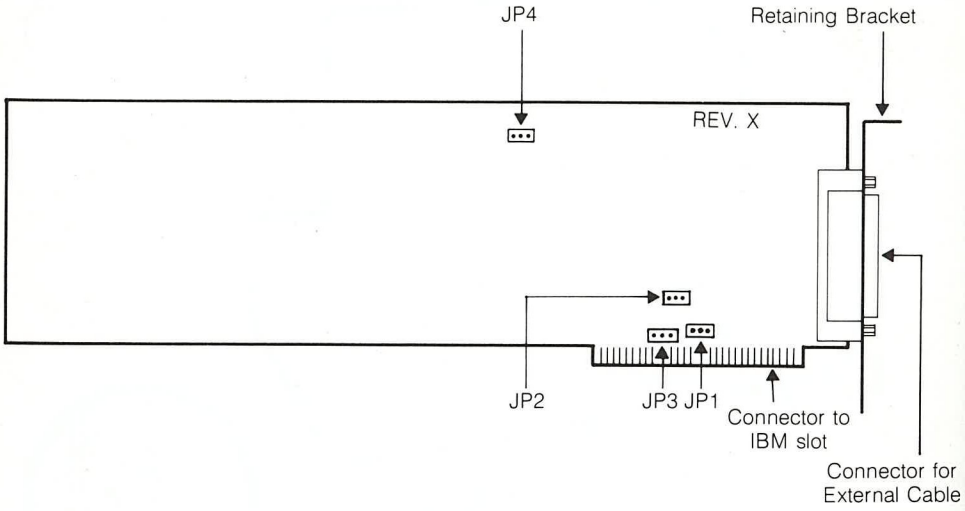

2 Checking Jumpers

Diskit 2 Is the Only Hard Drive

JP1

Diskit 2 Is the Second Hard Drive

JP1

Diskit 2 Plus: Enable Encryption

JP4

Disable Encryption

JP4

3 Preparation

1. Unlock the AT

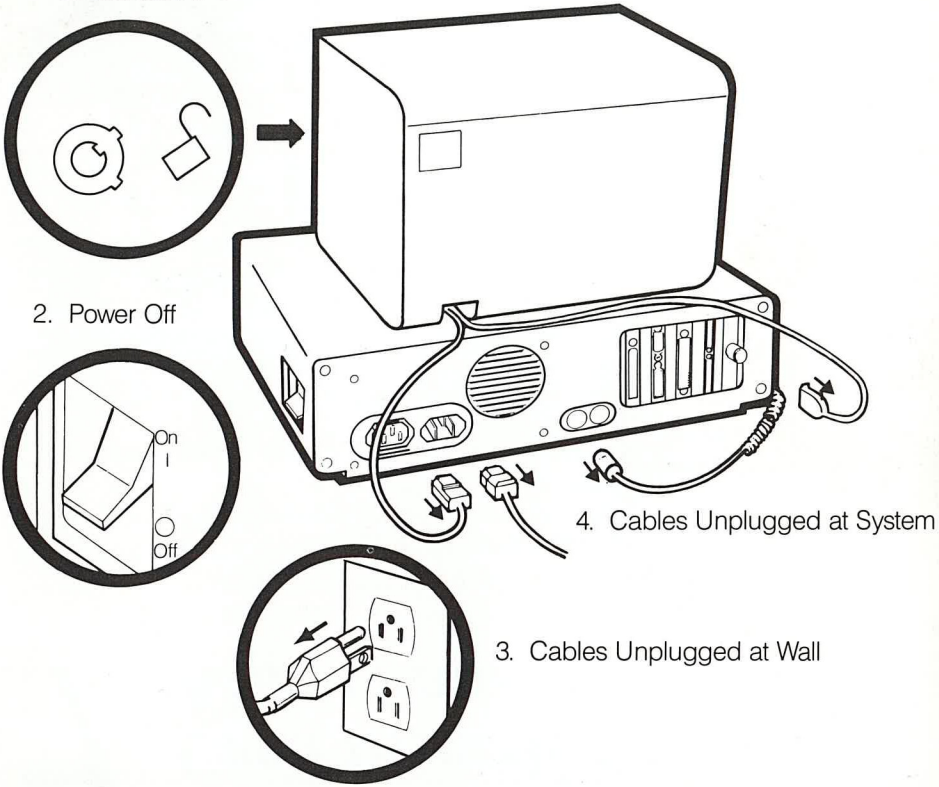

2. Power Off

4. Cables Unplugged at System

3. Cables Unplugged at Wall

4 Removing the IBM Cover Screws

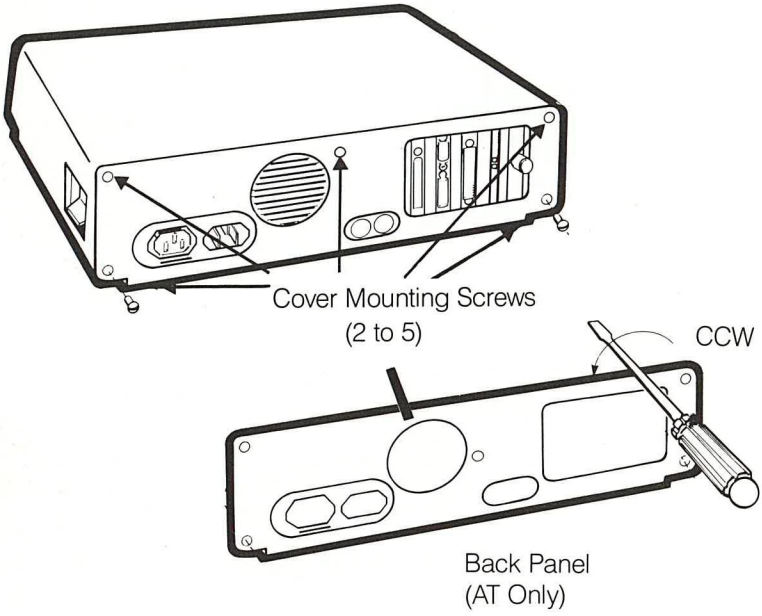

5 Removing the Cover

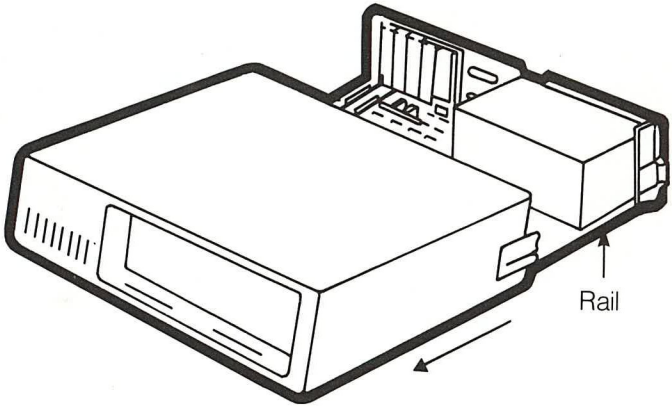

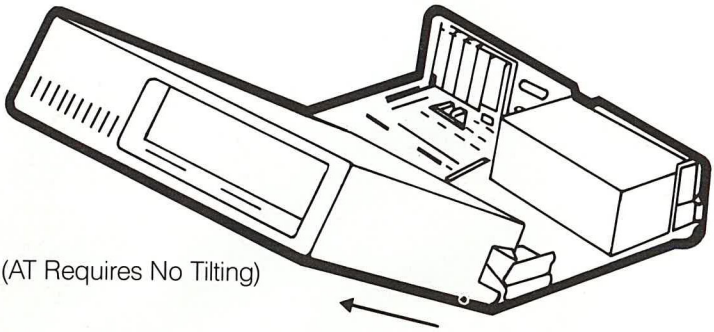

(AT Requires No Tilting)

6 Slot Cover Removal

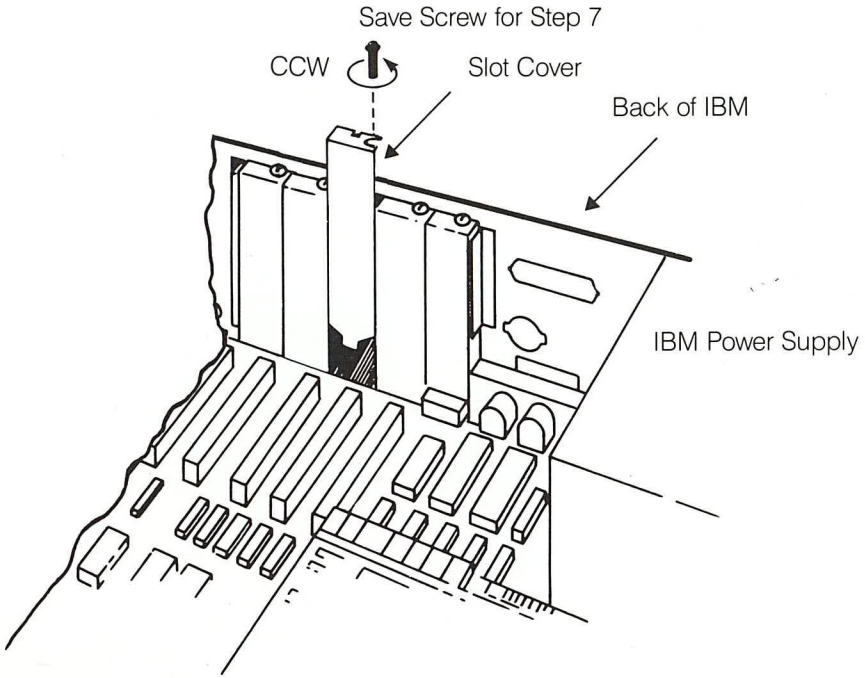

7 Card Insertion and Alignment

Hold the card by the top corners. Center the 62 Pin connector in the slot opening. Firmly press the edge connector into the expansion slot.

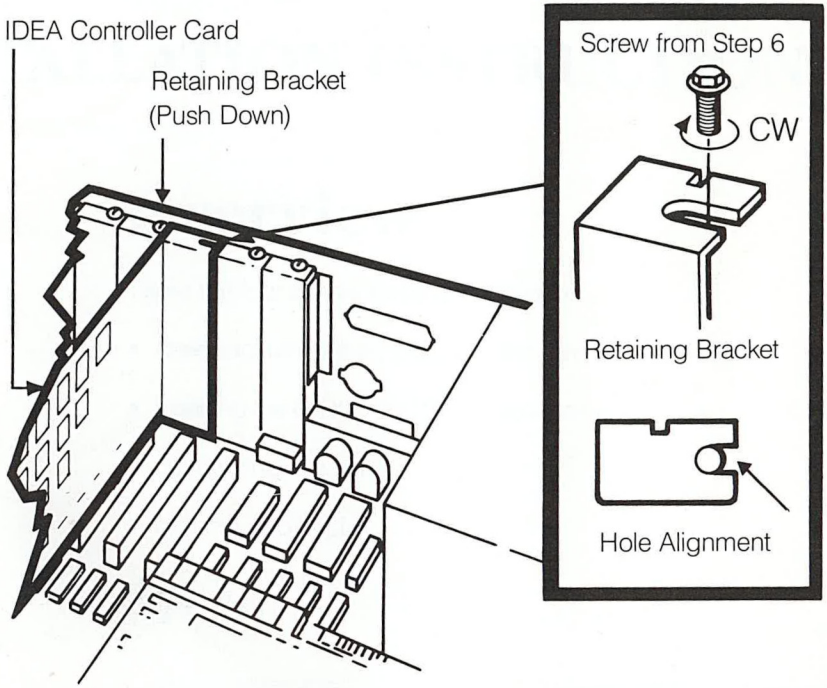

8 Connecting the Drive

Either end of the IDEA cable may attach to either the drive or the IBM.

The cable end only connects one way because of its shape. Be sure connections are firm. The cable should be free of the IBM frame.

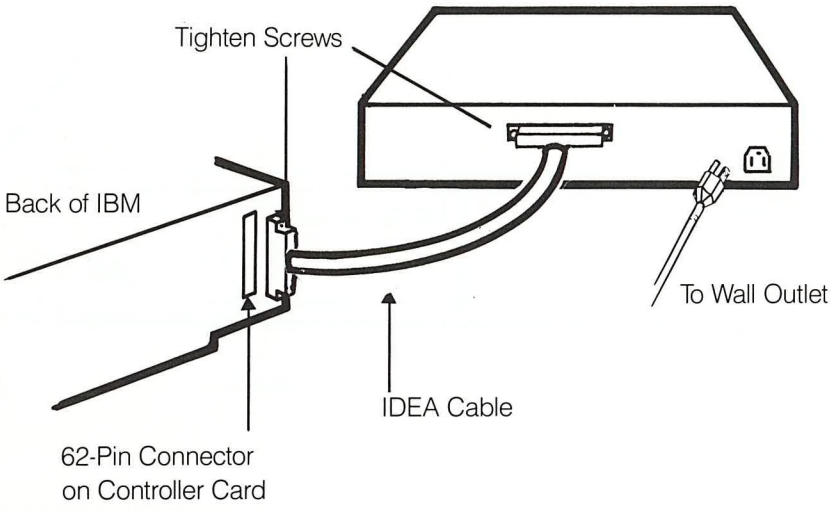

9 Recabling

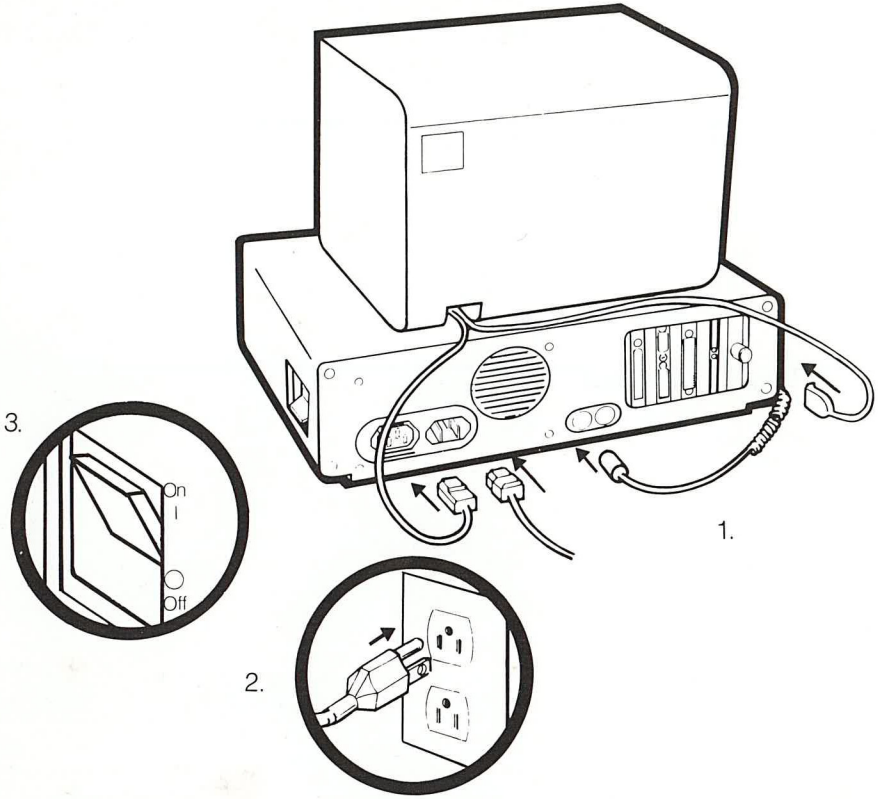

10 Running Install

1. Make a copy of the IDEA diskette. Put the original away for safekeeping.

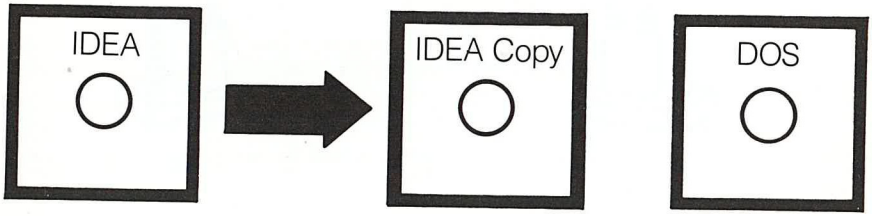

2. Boot your system with a DOS diskette.

3. Place the copy of the IDEA diskette in Drive A.

4. Type INSTALL and press the Return key. INSTALL runs diagnostics and offers to make one drive bootable. Messages are self-explanatory. Complete documentation is in the Reference Guide.